


Paint Spray Gun Washer Catalogue

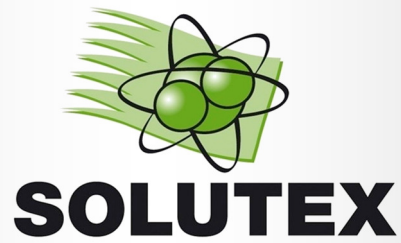

High quality equipment for your paint facility, accept nothing less

FOR WATER BASED PAINTS

English 2018



P11 Manual



- Manual wash of waterborne paint
- Perfect for disposable cup system
- Venturi pump for washing with recirculating liquid
- Nebulizer for clean water final rinse
- Absorbent cloth collects paint sludge
- Air gun for final drying
- 100% stainless steel
- ATEX II 2G



| Dimensions | Weight | Operation | Air Pressure |
|---------------------|--------|-----------|--------------------|
| 490 x 690 x 1490 mm | 38 kg | pneumatic | Min 6 - max 10 bar |

177X Mini Water




- Manual wash of waterborne paint
- Pre-wash with brush fed by pump with recirculating fluid
- Nebulizer for clean water final rinse
- Brush can be connected to water supply
- Air gun for final drying
- Water / paint separation kit included
- 100% stainless steel
- ATEX II 2G



| Dimensions | Weight | Operation | Air Pressure |
|---------------------|--------|-----------|--------------------|
| 450 x 660 x 1335 mm | 44 kg | pneumatic | Min 6 - max 10 bar |

182CX Multi Water



- Manual and automatic wash of water-borne paint
- Vapour exhaust system
- Automatic wash with recirculating liquid fed by diaphragm pump
- Final rinse with clean water fed by venturi pump and nebulizer
- Brush can be connected to water supply
- Air gun for final drying
- Water / paint separation kit included
- Colour tests allowed
- 100% stainless steel
- ATEX II 2G




| Dimensions | Weight | Operation | Air Pressure | Exhaust duct |
|---------------------|--------|-----------|--------------------|--------------|
| 450 x 685 x 1500 mm | 49 kg | pneumatic | Min 6 - max 10 bar | 120 mm |

250Ax—250BX Paint Work Bench



II 2G



- Work bench
- 100% stainless steel
- Ideal for mixing, stirring and diluting waterborne and solvent based paint
- **Model 250BX only:** Vapour extraction From work area and 2 venturi pumps for dosing the thinner or liquid to be diluted
- ATEX II 2G



| Dimensions | Weight | Operation | Air Pressure | Exhaust duct |
|----------------------|--------|-----------|--------------------|--------------|
| 1090 x 690 x 1465 mm | 62 kg | Pneumatic | Min 6 - max 10 bar | 150 mm |

110 Water Paint Separation Kit



II 2G

- Ideal for paint / water separation
- Includes a plastic container and a perforated container to support filters
- Air mixer to stir water with coagulating powder



| Dimensions | Weight | Tank capacity |
|--------------------|--------|---------------|
| 600 x 400 x 500 mm | 4.5 kg | 50 litres |

189 Active Carbon Filter

- Designed for the removal of exhausted vapours
- Can be adapted to all spray gun washers
- Active carbon can be replaced when exhausted
- Abatement percentage >50%



| Dimensions | Weight | Carbon content |
|--------------------|--------|----------------|
| 310 x 310 x 780 mm | 28 kg | 12 kg |

RE-5 RE-10 Remover Detergent

- Concentrated detergent for diluting with water
- New formulation with very low foam
- Used cold: it improves spray gun washing also with dry paint
- Used hot: it halves washing time and allows a thorough cleaning with dried paint too
- Keeps pump, hoses and washing nozzles clean
- Prevents dirt forming inside spray gun washer body
- Product is re usable after coagulation
- 5-15% dilution with water



5 and 10 litre packs

Flock Coagulating Powder

- Coagulating powder for water / paint separation
- 2 kg or 25 kg packs





Solutex Ltd

Unit 1, Ellesmere Business Park

Ellesmere, SY12 0EW United Kingdom

Tel: +44 (0) 1691 622225 Fax: +44 (0) 1691 622277

www.solutex.co.uk info@solutex.co.uk

